


P1 Relay V23026

- Directly triggerable with TTL standard modules as ALS, HCT & ACT
- Slim line 13.5x7.85mm (0.531x0.309")
- Switching current 1 A
- Bifurcated 1 form C (CO) contact
- Immersion cleanable
- High sensitivity results in low nominal power consumption, 65 to 130mW for monostable and 30 to 150mW for bistable (latching)
- Initial surge withstand voltage
 2.5kV (2/10µs) meets the Bellcore Requirement GR-1089
 1.5kV (10/160µs) meets FCC Part 68

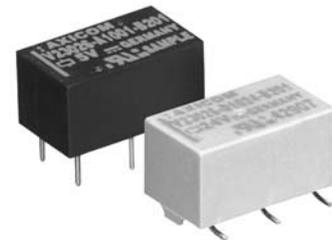

P1_THTSMD

Typical applications

Automotive equipment, CAN bus, immobilizer, office equipment, measurement and control equipment, medical equipment, safety equipment



Approvals

UL 508 File No. E 111441
 Technical data of approved types on request

Contact Data

| | |
|-------------------------------------|---|
| Contact arrangement | 1 form C (CO) |
| Max. switching voltage | 125VDC, 150VAC |
| Rated current | 1A |
| Limiting continuous current, 85°C | 1A |
| Breaking capacity max. | see max. DC load breaking capacity |
| Contact material | Palladium nickel, gold-rhodium covered |
| Contact style | bifurcated contact |
| Min. recommended contact load | 10mA at 20mV |
| Initial contact resistance | ≤50mΩ at 10mA/20mV |
| Frequency of operation without load | 200 ops./s |
| Operate/release time max. | 2ms |
| Set/reset time max. | 2ms |
| Bounce time max. | 3ms |
| Electrical endurance | |
| at 12V/10mA | typ. 50x10 ⁶ operations |
| at 6V/100mA | typ. 10x10 ⁶ operations |
| at 30V/1000mA | typ. 10x10 ³ operations |
| Contact ratings | |
| UL contact ratings | 30VDC/1A 65VDC/0.46A 150VAC/0.46A |
| Mechanical endurance | typ. 10 ⁹ operations |

Coil Data

| | |
|----------------------------|--|
| Magnetic system | polarized |
| Coil voltage range | 3 to 24VDC other coil voltages on request |
| Operative range, IEC 61810 | see coil operative range |
| Max. coil temperature | 85°C |
| Thermal resistance | <130K/W |

Coil versions, THT, monostable

| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance Ω ±10% | Rated coil power mW |
|-----------|-------------------|---------------------|---------------------|------------------------|---------------------|
| 006 | 3 | 2.25 | 0.3 | 137 | 66 |
| 001 | 5 | 3.75 | 0.5 | 370 | 68 |
| 005 | 9 | 6.75 | 0.9 | 1165 | 70 |
| 002 | 12 | 9.00 | 1.2 | 2250 | 34 |
| 004 | 24 | 18.00 | 2.4 | 4500 | 128 |


All figures are given for coil without pre-energization, at ambient temperature +23°C.

Coil versions, SMT, monostable


| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance Ω ±10% | Rated coil power mW |
|-----------|-------------------|---------------------|---------------------|------------------------|---------------------|
| 026 | 3 | 2.25 | 0.3 | 113 | 80 |
| 021 | 5 | 3.75 | 0.5 | 313 | 80 |
| 025 | 9 | 6.75 | 0.9 | 1015 | 80 |
| 022 | 12 | 9.00 | 1.2 | 1800 | 80 |
| 024 | 24 | 18.00 | 2.4 | 4500 | 128 |

All figures are given for coil without pre-energization, at ambient temperature +23°C.

Max. DC load breaking capacity

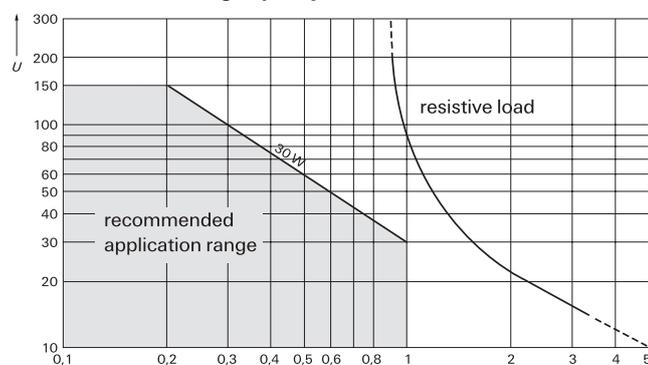

Coil operative range, monostable DC coil

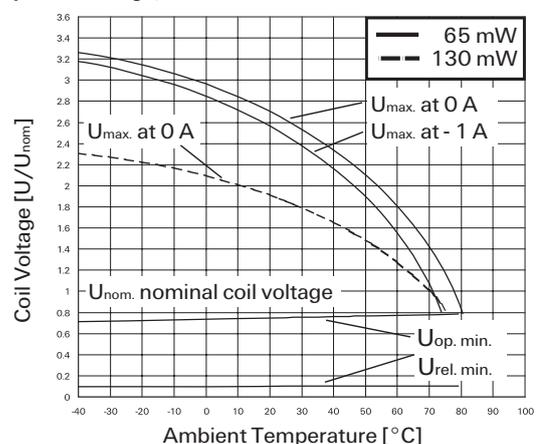

P1 Relay V23026 (Continued)

Coil data (continued)


Coil versions, THT and SMT, bistable 2 coils

| Coil code | Rated voltage VDC | Set voltage VDC | Reset voltage VDC | Coil resistance $\Omega \pm 10\%$ | Rated coil power mW |
|-----------|-------------------|-----------------|-------------------|-----------------------------------|---------------------|
| 106 | 3 | 2.25 | 2.25 | 130 | 69 |
| 101 | 5 | 3.75 | 3.75 | 390 | 64 |
| 105 | 9 | 6.75 | 6.75 | 1200 | 68 |
| 102 | 12 | 9.00 | 9.00 | 1500 | 96 |

All figures are given for coil without pre-energization, at ambient temperature +23°C. Coils I and II are identical.

¹⁾ A nominal voltage of 24VDC is feasible with a 12VDC coil with a series resistor (1500 Ω).

Coil operative range, bistable

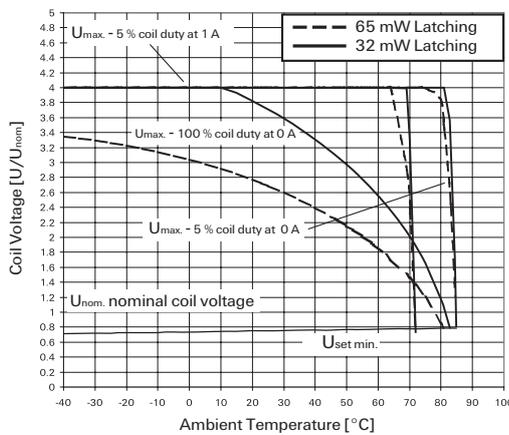


U_{max} upper limit of the operative range of the coil voltage (limiting voltage) when coils are continuously energized.

U_{op min} lower limit of the operative range of the coil voltage (reliable operate voltage).

U_{rel min} lower limit of the operative range of the coil voltage (reliable release voltage).

Dimensions


THT version

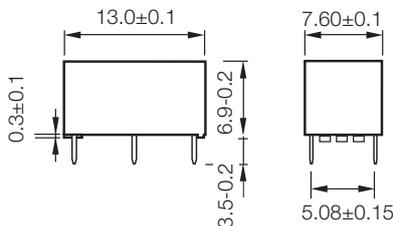

PCB layout

TOP view on component side of PCB

THT version

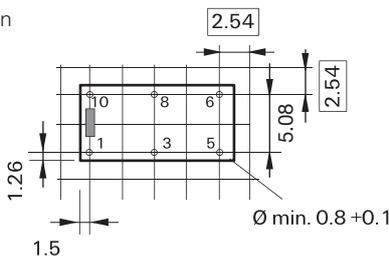

Insulation Data

| | |
|---------------------------------|----------------------|
| Initial dielectric strength | |
| between open contacts | 500V _{rms} |
| between contact and coil | 1500V _{rms} |
| Initial surge withstand voltage | |
| between contact and coil | 2500V |
| Capacitance | |
| between open contacts | max. 5pF |
| between contact and coil | max. 6pF |
| Clearance/creepage | |
| between contact and coil | 0.75mm |
| between adjacent contacts | 0.75mm |

RF Data


| | |
|---|-----------------|
| Isolation at 100MHz/900MHz | -30.0dB/-18.0dB |
| Insertion loss at 100MHz/900MHz | -0.12dB/-1.9dB |
| Voltage standing wave ratio (VSWR) at 100MHz/900MHz | 1.06/1.75 |

Other Data


Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at

| | |
|--|--|
| Ambient temperature | -40 to +85°C |
| Category of environmental protection, IEC 61810 | RT III - immersion cleanable |
| Vibration resistance (functional) | 20g, 200 to 2000Hz 40g, 10 to 200Hz |
| Shock resistance (functional) IEC 60068-2-27 (half sine) | 50 g |
| Terminal type | PCB terminals and SMT terminals |
| Weight | max. 2g |
| Resistance to soldering heat THT IEC 60068-2-20 | 265 °C/10s |
| Resistance to soldering heat SMT IEC 60068-2-58 | see reflow profile |
| Moisture sensitive level, JEDEC J-Std-020D | MSL3 |
| Washing | not recommended |
| Ultrasonic cleaning | possible |
| Packaging unit | |
| THT | 2000 pcs. |
| SMT | 2400 pcs. |

SMT version

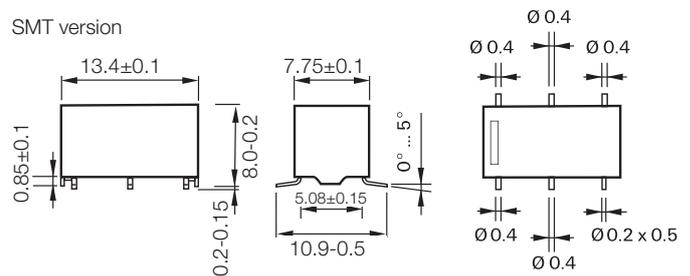


SMT version

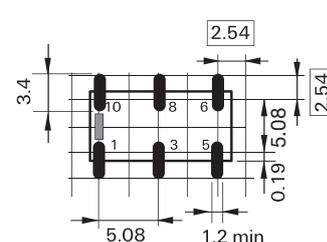


P1 Relay V23026 (Continued)

Terminal assignment


Monostable version
rest condition



Bistable version, 1 coil
reset condition



Bistable version, 2 coils
reset condition

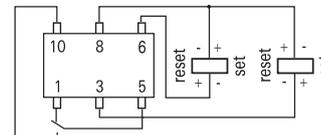


Contacts are shown in reset condition. Both coils can be used either as set or reset coil. Contact position might change during transportation and must be reset before use.

Processing


Recommended soldering conditions

Soldering conditions according IEC 60058-2-58 and IPC/JEDEC J-STD-020B

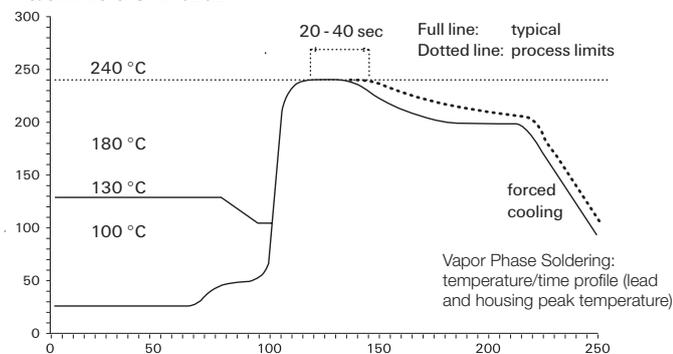


Packing


Tube for THT version
40 relays per tube, 2000 relays per box

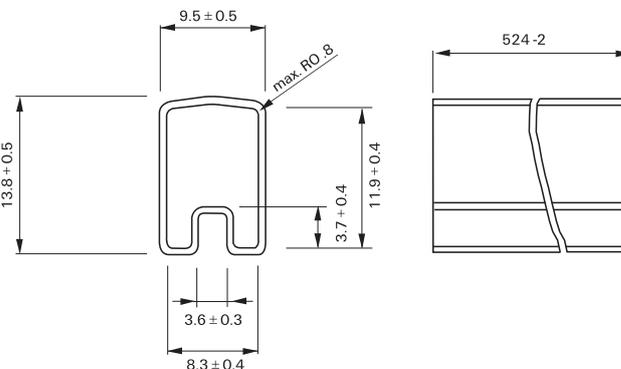


Resistance to soldering heat - Reflow profile

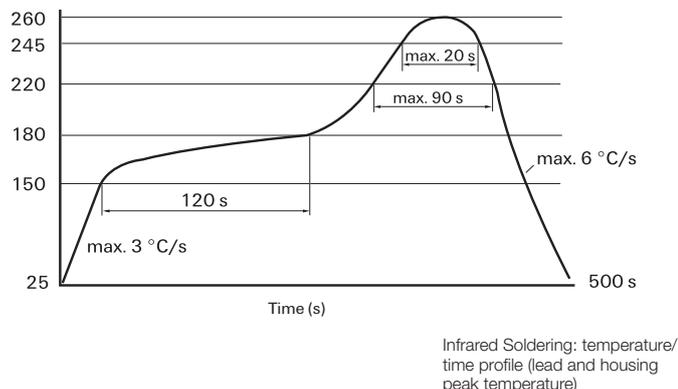


Tape and reel for SMT version
480 relays per reel, 2400 relays per box

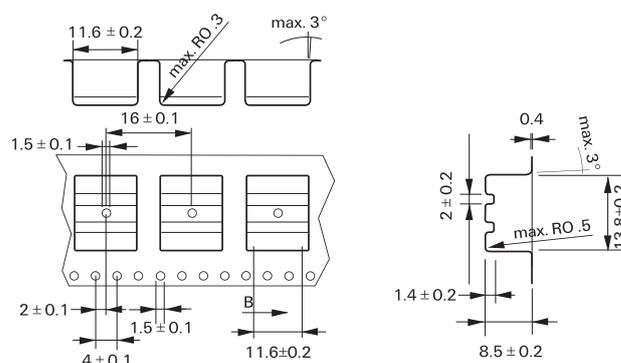

Recommended reflow soldering profile

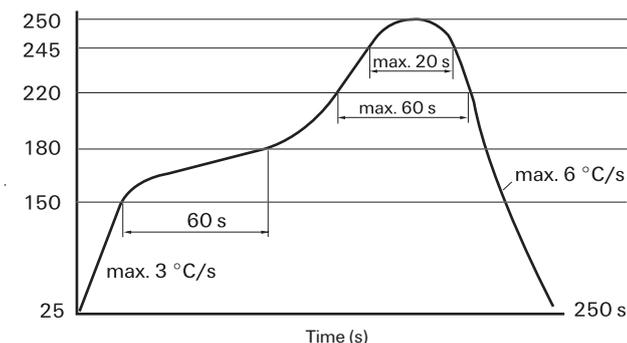

Reel dimensions

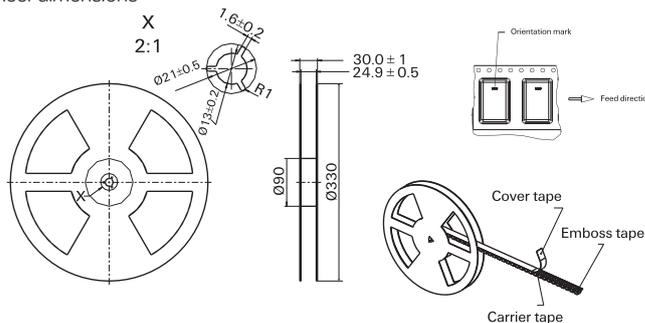



P1 Relay V23026 (Continued)

Product code structure

Typical product code **V23026** **A1** **002** **B201**

| | | | | | | |
|--|---|---------------------------|---|---|--|--|
| Type V23026 P1 Series Signal Relay | | | | | | |
| Version <table border="0"> <tr> <td>A1 THT, monostable</td> <td>D1 SMT, monostable</td> </tr> <tr> <td>B1 THT, bistable (latching), 2 coils</td> <td>E1 SMT, bistable (latching), 2 coils</td> </tr> <tr> <td>C1 THT, bistable (latching), 1 coil</td> <td>F1 SMT, bistable (latching), 1 coil</td> </tr> </table> | A1 THT, monostable | D1 SMT, monostable | B1 THT, bistable (latching), 2 coils | E1 SMT, bistable (latching), 2 coils | C1 THT, bistable (latching), 1 coil | F1 SMT, bistable (latching), 1 coil |
| A1 THT, monostable | D1 SMT, monostable | | | | | |
| B1 THT, bistable (latching), 2 coils | E1 SMT, bistable (latching), 2 coils | | | | | |
| C1 THT, bistable (latching), 1 coil | F1 SMT, bistable (latching), 1 coil | | | | | |
| Coil Coil code: please refer to coil versions table | | | | | | |
| Contacts B201 1 form C, 1 CO | | | | | | |

| Product Code | Version | Coil | Coil voltage | Part Number |
|-----------------|-------------|-------------------|--------------|-------------|
| V23026A1006B201 | THT version | monostable | 3VDC | 1-1393774-7 |
| V23026A1001B201 | | | 5VDC | 1393774-1 |
| V23026A1005B201 | | | 9VDC | 1-1393774-5 |
| V23026A1002B201 | | | 12VDC | 1393774-8 |
| V23026A1004B201 | | | 24VDC | 1-1393774-2 |
| V23026B1106B201 | | bistable, 2 coils | 3VDC | 1393775-3 |
| V23026B1101B201 | | | 5VDC | 3-1393774-4 |
| V23026B1105B201 | | | 9VDC | 1393775-2 |
| V23026B1102B201 | | | 12VDC | 3-1393774-5 |
| V23026C1056B201 | | | 3VDC | 2-1393774-6 |
| V23026C1051B201 | 5VDC | | 2-1393774-0 | |
| V23026C1057B201 | 9VDC | | 2-1393774-7 | |
| V23026C1052B201 | 12VDC | | 2-1393774-1 | |
| V23026C1054B201 | 24VDC | | 2-1393774-4 | |
| V23026D1026B201 | SMT version | | monostable | 3VDC |
| V23026D1021B201 | | 5VDC | | 1393776-3 |
| V23026D1025B201 | | 9VDC | | 1422015-9 |
| V23026D1022B201 | | 12VDC | | 1393776-4 |
| V23026D1024B201 | | 24VDC | | 1393776-7 |
| V23026E1106B201 | | bistable, 2 coils | 3VDC | 1393777-3 |
| V23026E1101B201 | | | 5VDC | 1422015-6 |
| V23026E1105B201 | | | 9VDC | 1393777-2 |
| V23026E1102B201 | | | 12VDC | 1393776-9 |
| V23026F1051B201 | | | 9VDC | 1422015-8 |
| V23026F1052B201 | 12VDC | 4-1393774-3 | | |

